

WESCAM MX™-15. FULLY DIGITAL. HIGH DEFINITION.

A Multi-Sensor, Multi-Spectral Imaging System in a Single Line Replaceable Unit (LRU)

The WESCAM MX-15 is ideal for medium-altitude, covert ISR, SAR missions and homeland security.

MULTI-SENSOR IMAGING/LASING PAYLOAD OPTIONS

- > Supports seven payload items simultaneously
- > HD thermal, HD daylight and HD low-light and HD SWIR cameras provide 24/7 imaging
- > Continuous wide-angle zoom
- > High-magnification step-zoom spotter
- > High-sensitivity color low-light imaging
- > Eye-safe laser rangefinder¹
- > Laser illuminator² in choice of wide, narrow or ultra narrow divergence

HIGH-PERFORMANCE GIMBAL

- > 4-axis stabilized turret with internal passive isolator for excellent stabilization performance
- > Sharp optics and superior stabilization performance results in industry leading target detection, recognition and identification range performance in the 15" class
- > Inertial Measurement Unit (IMU) mounted to optical bench for high target location accuracy
- > Inertial Navigation System (INS) auto-align to aircraft

ADVANCED IMAGE PROCESSING

- > Real-time image enhancement on all sensors
 - High-performance haze penetration
 - Improved feature recognition and ID
 - 2x, 4x Ezoom
 - Advanced video tracker
 - Imaging blending
 - Embedded Moving Target Indication
 - Pseudo-color IR

WESCAM ADVANCED VIDEO ENGINE (WAVE)

- > A high-performing embedded computing engine engineered to support advanced image-processing capabilities
- > WAVE architecture includes a state-of-the-art graphics processing unit (GPU) - enabling future advancements in image processing & surveillance automation



INTERFACE FLEXIBILITY


- > Built-in video switch matrix provides multiple HD-SDI and analog video outputs
- > 720p or 1080p HD video
- > Wide range of data ports: RS-232/422, Ethernet, MIL-STD-1553B, ARINC429
- > All standard WESCAM MX-Series functional interfaces

RUGGEDNESS

- > Rugged aerospace grade aluminum structure
- > MilSpec environmental, EMC, and power quality qualification
- > Built-in vibration isolator protects internal payload components
- > Rigorous environmental stress screening (ESS)
- > Designed to minimize maintenance requirements and simplify repair

SIMPLIFIED AIRCRAFT INTEGRATION

- > Electronics unit inside the turret
- > Built-in vibration isolation
- > Built-in GPS receiver
- > <19" turret height for better ground clearance
- > Compatible with standard quick disconnect mounts
- > Side mounted connectors for recessed installations
- > No calibration required for LRU swapout

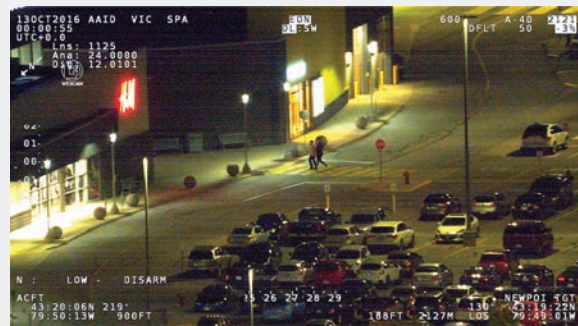

WESCAM MX-15

© 2019 L3Harris Technologies, Inc. | MX15-0501AB-Brochure

¹Consult factory for specific environmental and target conditions



L3HARRIS™
FAST. FORWARD.

The information contained within this product data sheet is not subject to export controls and may be released without export restrictions. The equipment described herein may require Canadian and/or U.S. Government authorization for export purposes. Diversion contrary to Canadian and/or U.S. law is prohibited.

1025 W. NASA Boulevard
Melbourne, FL 32919
t 1 800 668 4355
info.wescam@L3Harris.com